


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:13.252V I:1.7179A P:22.565W PF:0.9912 Freq:60.00Hz UTHDi:0.00% ITHDi:0.00% Lamp Flux:1046.34x1 lm


NAME: 5831-CSBZ-70°-6500K	TYPE: 固定式灯具	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WAC Lighting	SUR.: 0.01	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 46.37 lm/W			
MODEL		Imax(cd)	759.5	S/MH(C0/180)	1.17
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	1.05
RATED VOLTAGE(V)	15	TOTAL FLUX(lm)	1046.3	η UP,DN(C0-180)	0.0,47.8
NOMINAL FLUX(lm)	1046.34	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,52.1
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	1.00
TEST VOLTAGE(V)	15	η down(%)	99.9	CIBSE SHR MAX	1.10

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

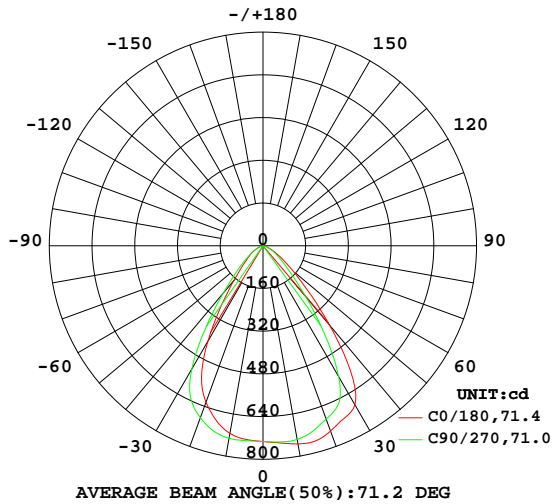

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

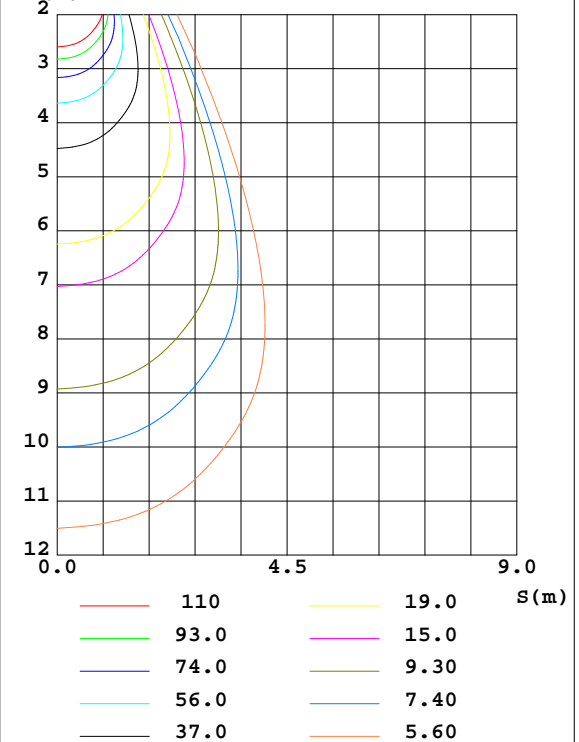

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Oliver
Test Date:2023-10-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:2.482m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM


ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	$\%lum$
10	713.5	720.0	732.0	744.2	753.6	753.9	736.9	719.9	0- 10	70.18	70.18	6.71
20	623.8	641.2	685.6	717.0	738.7	732.7	691.1	651.8	10- 20	202.0	272.2	26
30	413.2	440.9	533.6	637.7	688.4	671.4	567.8	464.4	20- 30	291.3	563.5	53.9
40	169.6	183.3	232.9	323.4	387.6	342.8	248.2	194.7	30- 40	251.3	814.8	77.9
50	78.80	83.00	94.67	124.7	146.2	129.2	99.96	85.52	40- 50	129.5	944.3	90.2
60	40.22	40.63	42.31	49.40	58.01	53.80	46.64	42.64	50- 60	64.40	1009	96.4
70	14.04	13.93	14.07	15.64	18.78	17.95	16.40	15.26	60- 70	29.40	1038	99.2
80	0.7407	0.8093	0.7788	0.7659	1.227	1.226	1.171	1.138	70- 80	7.167	1045	99.9
90	0.0123	0.0119	0.0107	0.0124	0.0084	0.0081	0.0077	0.0103	80- 90	0.2846	1046	99.9
100	0.0219	0.0234	0.0218	0.0249	0.0123	0.0132	0.0128	0.0163	90-100	0.0146	1046	99.9
110	0.0372	0.0328	0.0325	0.0318	0.0195	0.0213	0.0239	0.0305	100-110	0.0237	1046	99.9
120	0.0688	0.0595	0.0530	0.0477	0.1201	0.1101	0.1456	0.1683	110-120	0.0468	1046	99.9
130	0.1296	0.1180	0.1023	0.0941	0.1448	0.1553	0.1813	0.2129	120-130	0.0916	1046	99.9
140	0.2052	0.1886	0.1690	0.1551	0.2582	0.2685	0.2989	0.3307	130-140	0.1472	1046	100
150	0.2884	0.2690	0.2455	0.2315	0.3606	0.3667	0.3895	0.4186	140-150	0.1741	1046	100
160	0.3510	0.3315	0.3121	0.3028	0.4322	0.4293	0.4443	0.4664	150-160	0.1629	1046	100
170	0.3928	0.3791	0.3695	0.3638	0.4550	0.4502	0.4558	0.4621	160-170	0.1136	1046	100
180	0.4543	0.4479	0.4476	0.4495	0.4533	0.4502	0.4464	0.4449	170-180	0.0410	1046	100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Oliver
 Test Date:2023-10-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 γ Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:2.482m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

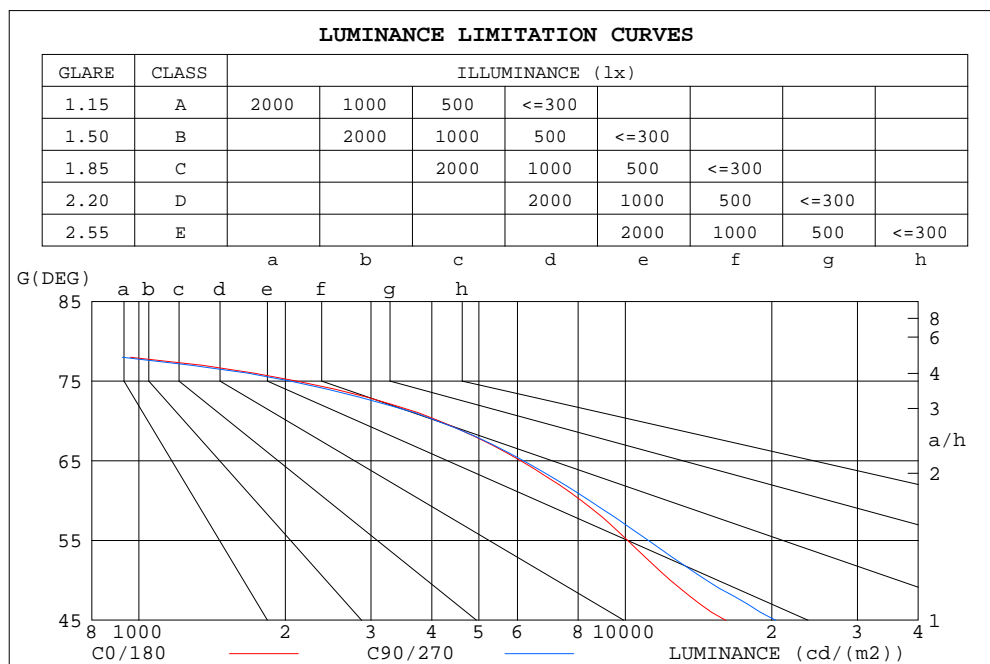


LUMINANCE cd/(m2)		
G(°)	C0/180	C90/270
85	246	200
80	431	448
75	2111	2049
70	4147	4107
65	6100	6178
60	8127	8447
55	10114	11162
50	12385	14701
45	16068	20360

C Range: 0 - 360°
C Interval: 22.5°
Test Speed: HIGH
Temperature: 25.3°
Operators: Oliver
Test Date: 2023-10-16

γ Range: 0 - 180°
γ Interval: 1.0°
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.482m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.09	1.06	1.04	1.07	1.04	1.02	1.03	1.01	.99	.99	.97	.96	.96	.94	.93	.91
2.0	.00	.95	.91	.98	.94	.90	.95	.91	.88	.92	.89	.86	.89	.86	.84	.82
3.0	.91	.86	.81	.90	.85	.80	.87	.83	.79	.85	.81	.78	.82	.79	.76	.75
4.0	.84	.77	.72	.83	.77	.72	.80	.75	.71	.78	.74	.70	.76	.73	.69	.68
5.0	.77	.70	.65	.76	.70	.65	.74	.69	.64	.73	.68	.64	.71	.67	.63	.62
6.0	.71	.64	.59	.71	.64	.59	.69	.63	.59	.67	.62	.58	.66	.61	.58	.56
7.0	.66	.59	.54	.66	.59	.54	.64	.58	.54	.63	.58	.54	.62	.57	.53	.52
8.0	.62	.55	.50	.61	.54	.50	.60	.54	.50	.59	.53	.49	.58	.53	.49	.48
9.0	.57	.51	.46	.57	.50	.46	.56	.50	.46	.55	.50	.46	.54	.49	.46	.44
10.0	.54	.47	.43	.53	.47	.43	.52	.47	.43	.52	.46	.42	.51	.46	.42	.41

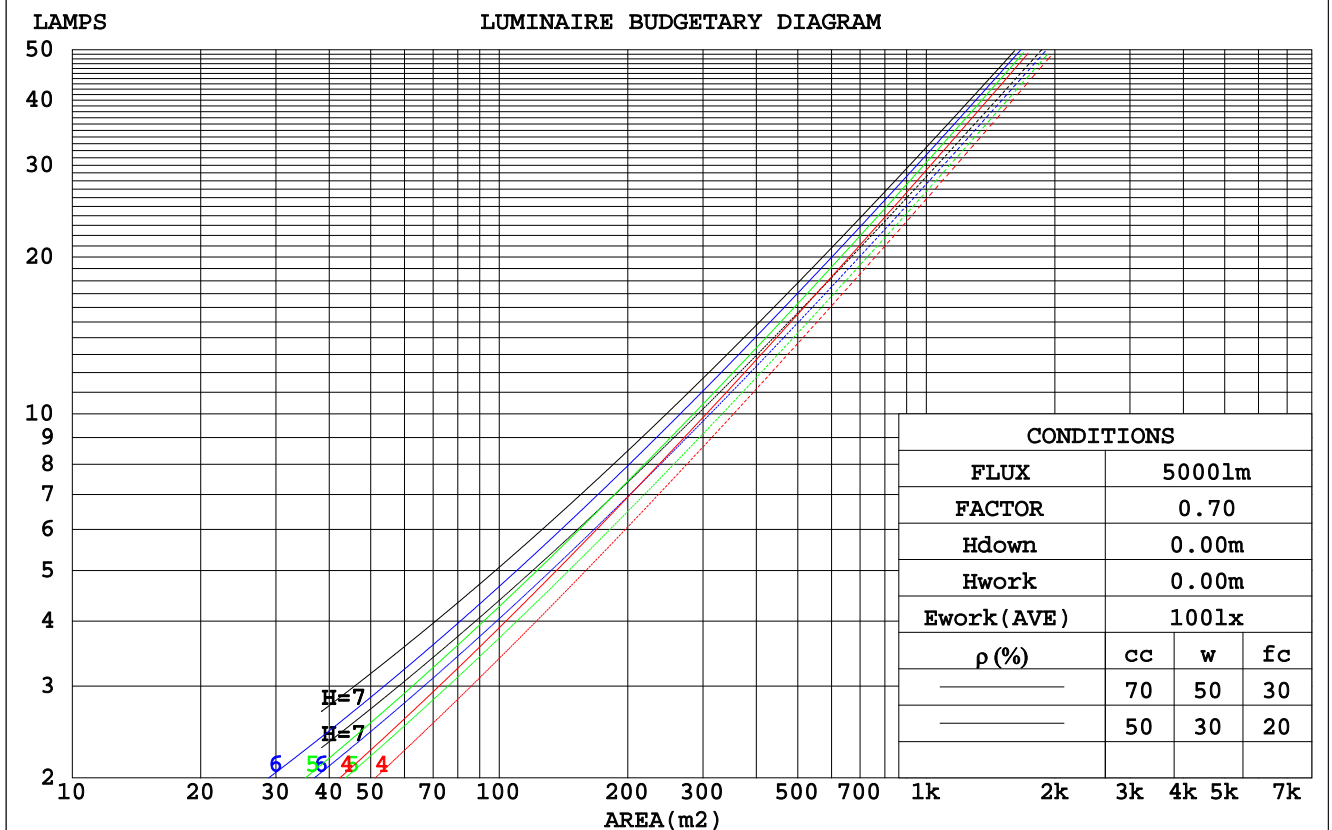

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2023-10-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.482m [K=1.0000]
Remarks:

WEC AND CCEC

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.207	.118	.037	.201	.114	.036	.188	.108	.034	.176	.102	.033	.165	.096	.031	
2.0	.202	.111	.034	.196	.108	.033	.185	.103	.032	.175	.098	.031	.166	.094	.030	
3.0	.193	.103	.031	.188	.101	.030	.178	.097	.029	.170	.093	.029	.161	.089	.028	
4.0	.183	.095	.028	.179	.094	.028	.171	.091	.027	.163	.088	.026	.156	.085	.026	
5.0	.174	.089	.026	.170	.087	.025	.163	.085	.025	.156	.082	.025	.150	.080	.024	
6.0	.165	.083	.024	.162	.082	.024	.155	.080	.023	.149	.078	.023	.144	.076	.022	
7.0	.157	.078	.022	.154	.077	.022	.148	.075	.022	.143	.073	.021	.138	.072	.021	
8.0	.150	.073	.021	.147	.072	.020	.142	.071	.020	.137	.069	.020	.132	.068	.020	
9.0	.142	.069	.019	.140	.068	.019	.135	.067	.019	.131	.066	.019	.127	.064	.019	
10.0	.136	.065	.018	.134	.065	.018	.129	.063	.018	.126	.062	.018	.122	.061	.018	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.174	.158	.143	.149	.135	.123	.102	.093	.085	.059	.054	.050	.019	.017	.016	
2.0	.161	.133	.110	.138	.114	.095	.094	.079	.066	.054	.046	.039	.017	.015	.013	
3.0	.150	.114	.086	.129	.099	.074	.088	.069	.052	.051	.040	.031	.016	.013	.010	
4.0	.141	.100	.069	.121	.087	.060	.083	.060	.042	.048	.035	.025	.016	.011	.008	
5.0	.133	.089	.056	.115	.077	.049	.079	.054	.034	.046	.032	.020	.015	.010	.007	
6.0	.127	.080	.047	.109	.069	.041	.075	.049	.029	.044	.029	.017	.014	.009	.006	
7.0	.120	.073	.040	.103	.063	.034	.071	.044	.024	.042	.026	.015	.013	.009	.005	
8.0	.115	.067	.034	.099	.058	.030	.068	.041	.021	.040	.024	.013	.013	.008	.004	
9.0	.109	.062	.030	.094	.054	.026	.065	.038	.018	.038	.022	.011	.012	.007	.004	
10.0	.105	.057	.026	.090	.050	.023	.063	.035	.016	.037	.021	.010	.012	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2023-10-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.482m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	18.4	19.5	18.6	19.7	19.9	19.1	20.3	19.4	20.4	20.6
3H	18.6	19.6	18.8	19.8	20.0	19.3	20.3	19.5	20.5	20.7
4H	18.5	19.5	18.8	19.8	20.0	19.2	20.2	19.5	20.4	20.7
6H	18.5	19.4	18.8	19.6	19.9	19.1	20.0	19.4	20.3	20.6
8H	18.4	19.3	18.7	19.6	19.8	19.1	20.0	19.4	20.2	20.5
12H	18.4	19.2	18.7	19.5	19.8	19.0	19.9	19.4	20.2	20.4
4H 2H	18.4	19.4	18.7	19.7	19.9	19.1	20.1	19.4	20.3	20.6
3H	18.7	19.6	19.0	19.8	20.1	19.3	20.2	19.7	20.4	20.7
4H	18.7	19.5	19.1	19.8	20.1	19.3	20.1	19.7	20.4	20.7
6H	18.6	19.3	19.0	19.6	20.0	19.2	19.9	19.6	20.2	20.6
8H	18.6	19.2	19.0	19.6	19.9	19.2	19.8	19.6	20.1	20.5
12H	18.5	19.1	18.9	19.5	19.9	19.1	19.7	19.5	20.1	20.5
8H 4H	18.6	19.2	19.0	19.6	20.0	19.2	19.8	19.6	20.2	20.5
6H	18.5	19.0	19.0	19.4	19.9	19.1	19.6	19.5	20.0	20.4
8H	18.5	18.9	18.9	19.4	19.8	19.1	19.5	19.5	19.9	20.4
12H	18.4	18.8	18.9	19.3	19.7	19.0	19.4	19.5	19.8	20.3
12H 4H	18.6	19.1	19.0	19.5	19.9	19.2	19.7	19.6	20.1	20.5
6H	18.5	18.9	18.9	19.4	19.8	19.1	19.5	19.5	19.9	20.4
8H	18.4	18.8	18.9	19.3	19.7	19.0	19.4	19.5	19.8	20.3
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.2 / - 1.9					+ 2.0 / - 2.3				
1.5H	+ 1.8 / - 1.1					+ 3.0 / - 1.6				
2.0H	+ 1.9 / - 1.9					+ 2.9 / - 2.3				

CIE Pub.117, 1046 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 0.2$)Area: 0.01 m²

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2023-10-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.482m [K=1.0000]
 Remarks:


UTILIZATION FACTORS TABLE

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	77	69	65	77	69	64	76	69	64	60
0.80	86	79	74	85	78	74	84	78	73	69
1.00	93	85	81	92	85	80	90	85	80	75
1.25	98	91	87	97	91	86	94	89	85	80
1.50	101	95	91	100	94	90	97	93	89	84
2.00	105	100	96	104	99	95	101	97	94	88
2.50	107	103	99	106	101	98	102	99	96	90
3.00	110	105	102	108	104	101	104	101	99	92
4.00	112	108	106	110	107	104	106	104	102	94
5.00	113	111	108	111	109	107	107	105	103	95
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004				Suspended				SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2023-10-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.482m [K=1.0000]
 Remarks:


ISOCANDELA DIAGRAM

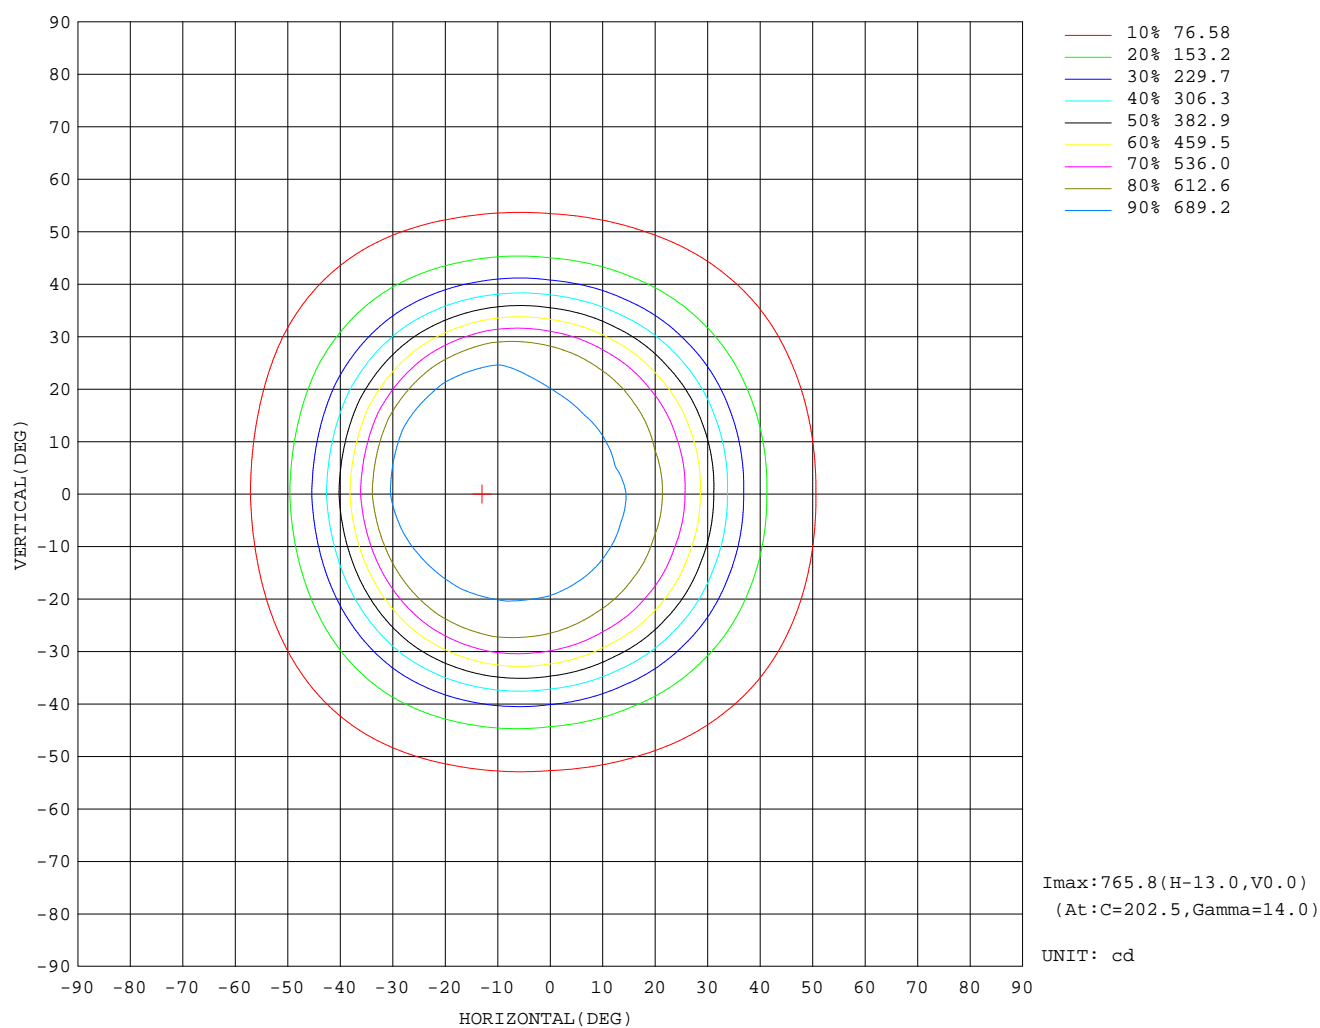

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2023-10-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.482m [K=1.0000]
Remarks:


AAI Figure

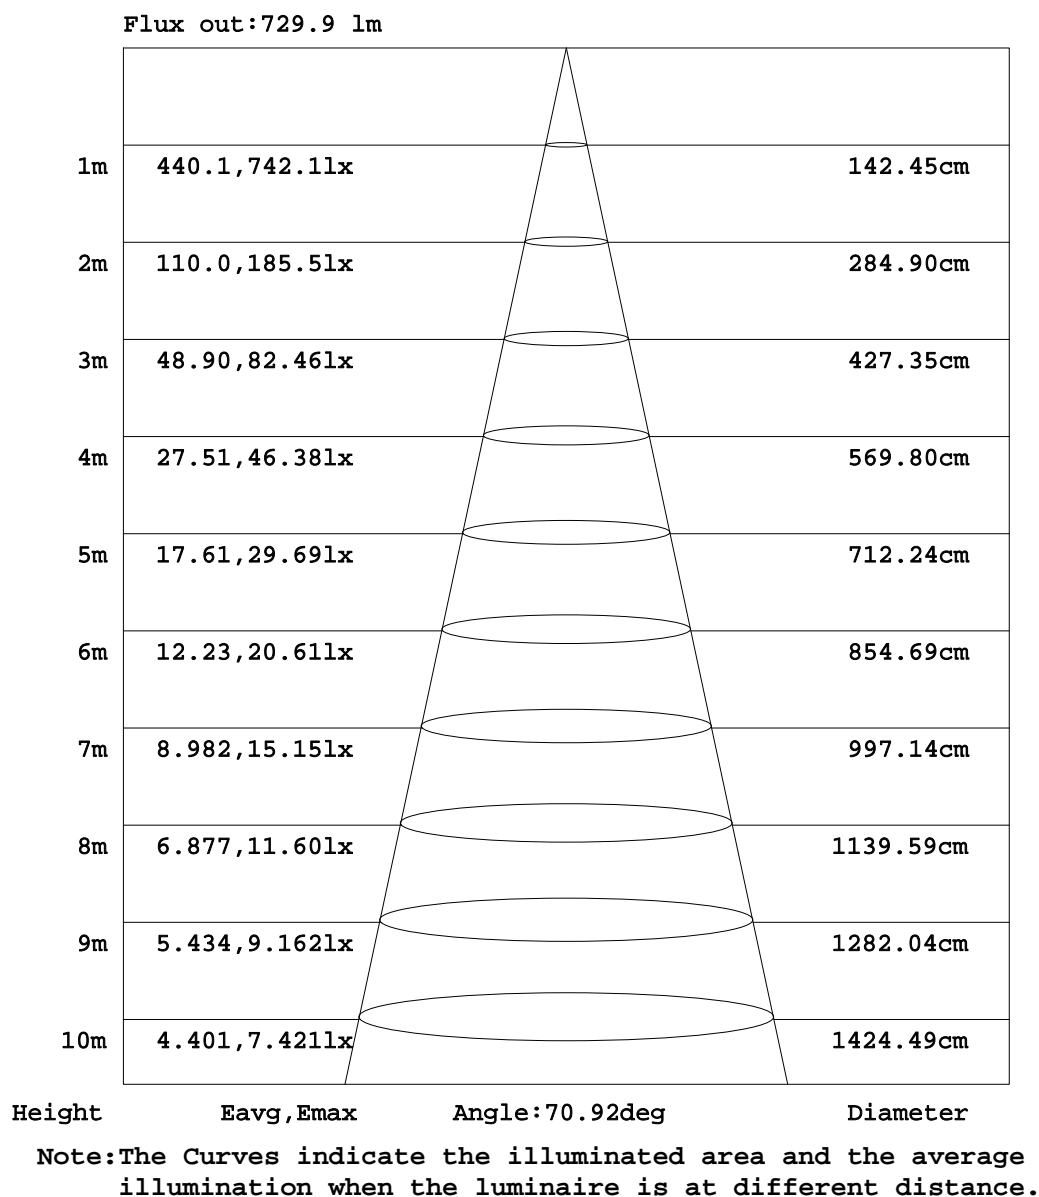

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Oliver
Test Date:2023-10-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:2.482m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

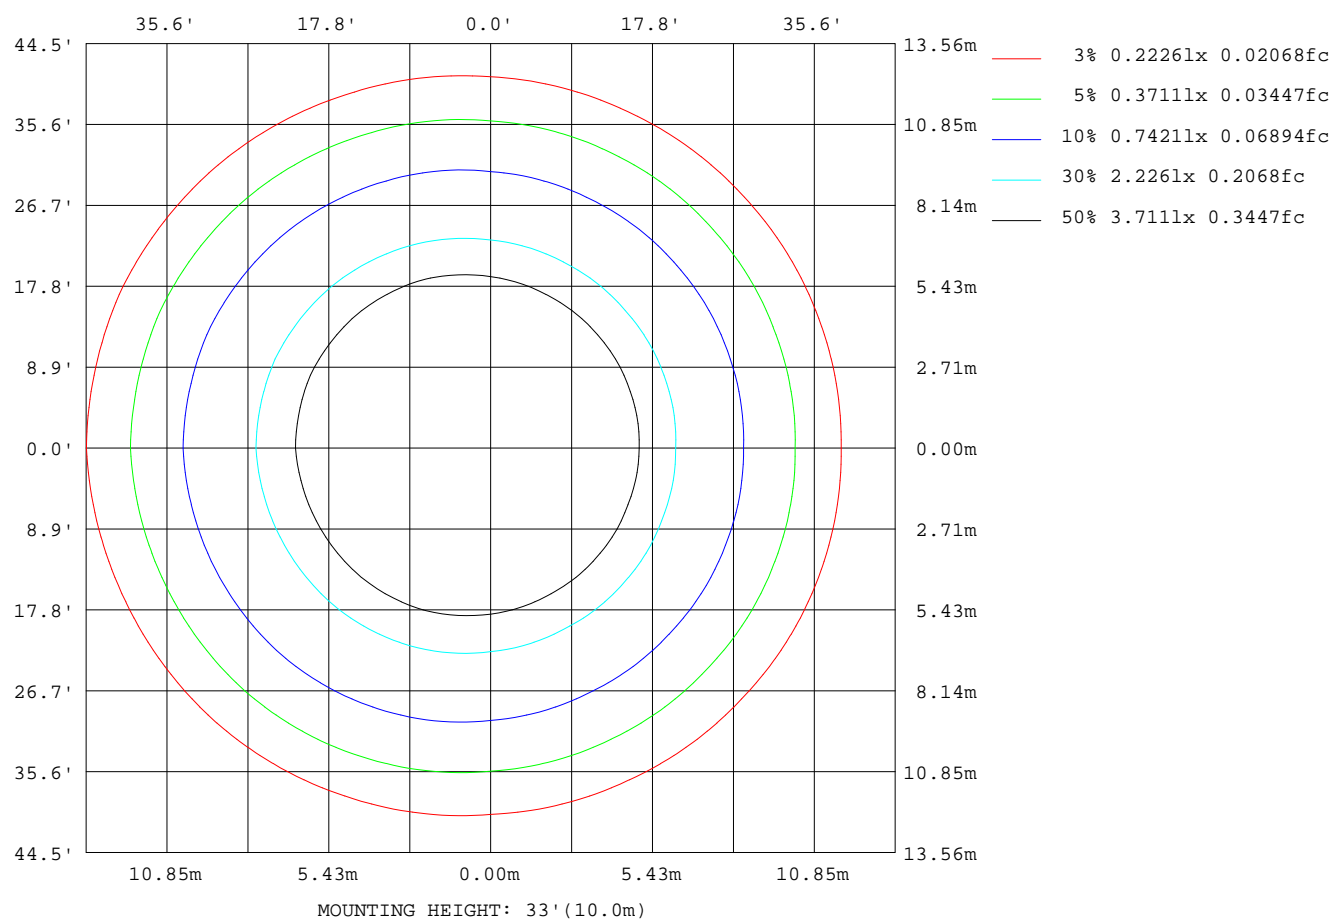

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2023-10-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.482m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:13.252V I:1.7179A P:22.565W PF:0.9912 Freq:60.00Hz UTHDi:0.00% ITHDi:0.00% Lamp Flux:1046.34x1 lm

NAME: 5831-CSBZ-70°-6500K	TYPE: 固定式灯具	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WAC Lighting	SUR.: 0.01	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	7202
L_0~180(75)av	2429
L_0~180(85)av	221
L_90~270(65)av	6602
L_90~270(75)av	2272
L_90~270(85)av	228
L_45(65)av	6862
L_45(75)av	2332
L_45(85)av	230

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Oliver
Test Date:2023-10-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:2.482m [K=1.0000]
Remarks:

Planar Illuminance Curve

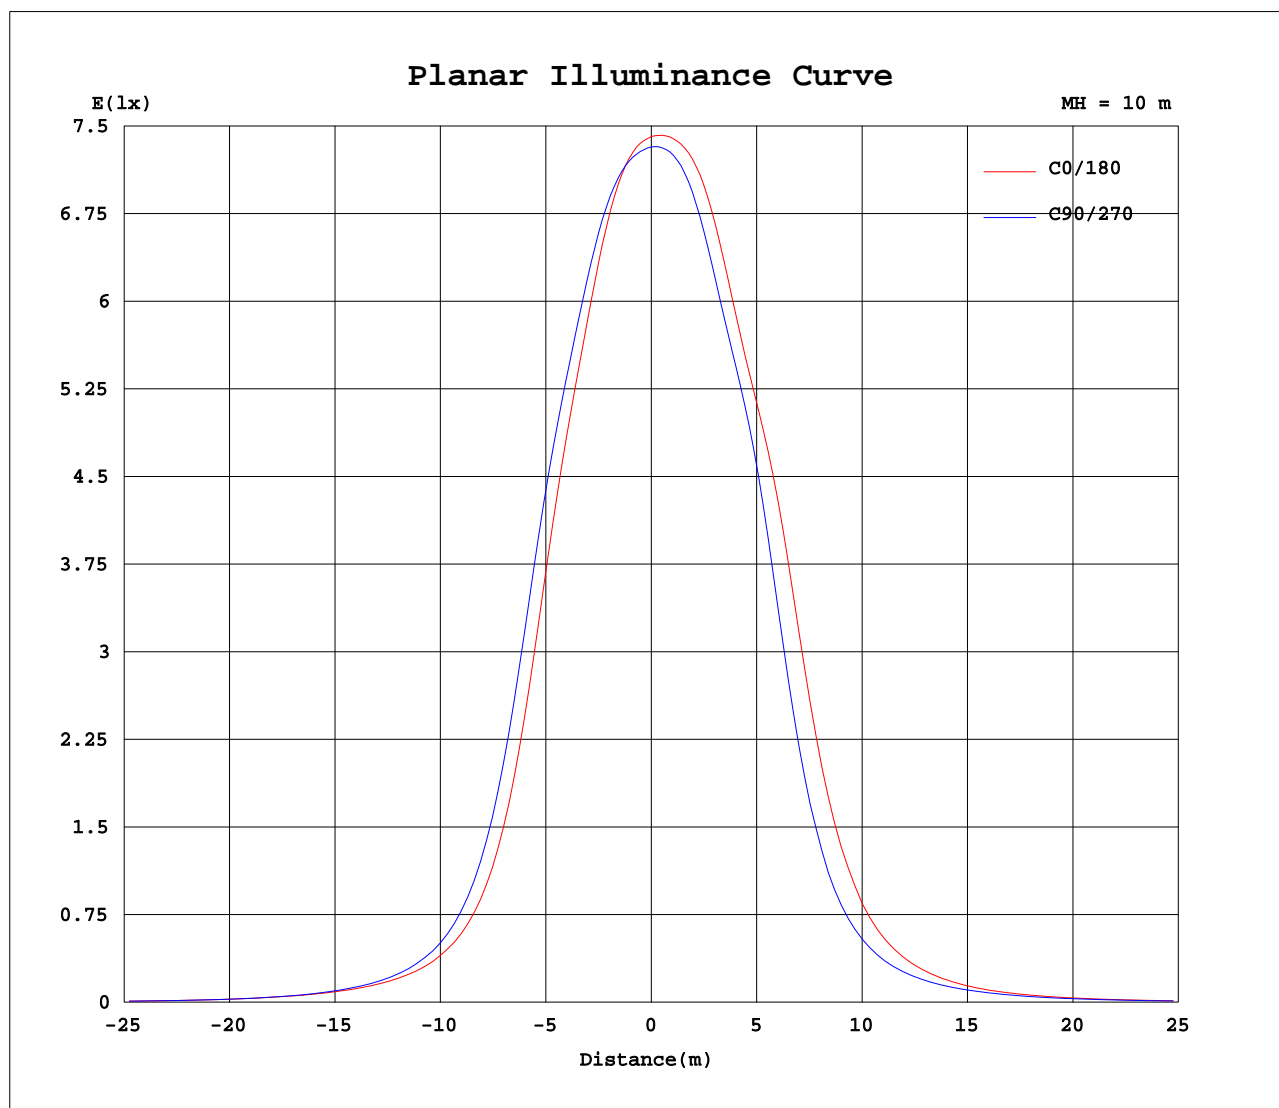

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2023-10-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.482m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	733	733	733	733	733	733	733	733	733	733	733	733	733	733	733	733			
5	728	729	729	731	733	735	738	740	742	742	742	741	738	735	732	729			
10	714	716	720	726	732	738	744	749	754	755	754	747	737	727	720	716			
15	677	680	691	705	718	729	739	749	757	758	755	740	719	702	691	682			
20	624	626	641	662	686	703	717	728	739	739	733	715	691	669	652	635			
25	545	547	568	598	637	672	692	706	715	719	712	697	662	623	590	566			
30	413	417	441	478	534	594	638	670	688	692	671	633	568	509	464	438			
35	271	276	294	326	374	437	494	539	571	566	525	467	400	349	313	291			
40	170	173	183	202	233	277	323	359	388	379	343	297	248	217	195	181			
45	112	115	120	128	144	170	198	220	237	231	208	179	153	137	125	118			
50	78.8	80.8	83.0	87.5	94.7	109	125	136	146	143	129	113	100.0	91.3	85.5	82.2			
55	57.4	58.6	59.6	61.2	64.1	70.4	78.7	85.8	92.2	90.4	83.5	74.8	68.2	63.6	60.6	59.3			
60	40.2	40.4	40.6	41.2	42.3	45.5	49.4	54.0	58.0	57.2	53.8	49.9	46.6	44.2	42.6	42.0			
65	25.5	25.5	25.5	25.7	26.2	27.5	29.9	32.5	35.4	34.9	33.1	31.3	29.6	28.4	27.5	27.2			
70	14.0	13.9	13.9	13.9	14.1	14.4	15.6	16.8	18.8	18.4	18.0	17.1	16.4	15.7	15.3	15.2			
75	5.41	5.42	5.38	5.35	5.31	5.41	5.74	6.09	7.16	7.11	6.85	6.76	6.45	6.33	6.17	6.25			
80	0.74	0.78	0.81	0.80	0.78	0.76	0.77	0.77	1.23	1.24	1.23	1.18	1.17	1.15	1.14	1.12			
85	0.21	0.20	0.18	0.18	0.17	0.17	0.16	0.13	0.17	0.19	0.21	0.23	0.22	0.24	0.24	0.24			
90	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01			
95	0.02	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01			
100	0.02	0.02	0.02	0.02	0.02	0.03	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02			
105	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.02	0.02	0.02	0.02	0.02			
110	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.03			
115	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.03	0.04	0.04	0.05	0.06	0.06			
120	0.07	0.07	0.06	0.06	0.05	0.05	0.05	0.05	0.12	0.13	0.11	0.13	0.15	0.16	0.17	0.17			
125	0.10	0.09	0.09	0.08	0.08	0.07	0.07	0.06	0.09	0.09	0.10	0.11	0.12	0.13	0.14	0.15			
130	0.13	0.12	0.12	0.11	0.10	0.09	0.09	0.09	0.14	0.15	0.16	0.17	0.18	0.20	0.21	0.22			
135	0.17	0.16	0.16	0.15	0.14	0.13	0.12	0.12	0.20	0.21	0.22	0.23	0.25	0.26	0.28	0.29			
140	0.21	0.20	0.19	0.18	0.17	0.16	0.16	0.15	0.26	0.26	0.27	0.28	0.30	0.32	0.33	0.34			
145	0.25	0.24	0.23	0.22	0.20	0.20	0.19	0.19	0.31	0.31	0.32	0.33	0.35	0.36	0.38	0.39			
150	0.29	0.28	0.27	0.26	0.25	0.24	0.23	0.23	0.36	0.36	0.37	0.38	0.39	0.40	0.42	0.43			
155	0.32	0.31	0.30	0.29	0.28	0.27	0.27	0.26	0.40	0.40	0.40	0.41	0.42	0.43	0.44	0.46			
160	0.35	0.34	0.33	0.32	0.31	0.31	0.30	0.30	0.43	0.43	0.43	0.44	0.44	0.45	0.47	0.48			
165	0.37	0.36	0.35	0.35	0.34	0.34	0.33	0.33	0.45	0.45	0.45	0.45	0.46	0.46	0.47	0.48			
170	0.39	0.39	0.38	0.37	0.37	0.37	0.36	0.37	0.45	0.46	0.45	0.45	0.46	0.46	0.46	0.47			
175	0.44	0.43	0.43	0.42	0.42	0.42	0.42	0.42	0.46	0.46	0.46	0.45	0.45	0.46	0.46	0.46			
180	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.44	0.44	0.45			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2023-10-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.482m [K=1.0000]
 Remarks: