

A1RS-2661L-DW, A1RS-2471L-DW, A1RS-2571L-DW

ASTRO 2" Shallow - New Construction Housing



SPECIFICATIONS

Input	Universal 120-277V AC 50/60 Hz
Standards:	ETL & cETL, IC-rated, Airtight (see below for list)
Dimming:	Electronic Low Voltage (ELV): 100%-1% Triac: 100%-1% 0-10V: 100%-1%
Emergency:	EM xtures provided with integral Emergency battery back up with 24" lead wire remote test switch. Provides at least 90 minutes of 6W illumination during emergency operation.
Mounting:	New construction housings included with universal mounting brackets and hanger bars Ceiling cutout (Round and Square): Ø 3 1/2" Ceiling thickness: 1/2" - 1"
Construction:	20 Gauge galvanized sheet
Warranty:	5 year product warranty


Fixture Type:

Catalog Number:


Project:

Location:

New Construction Trimmed

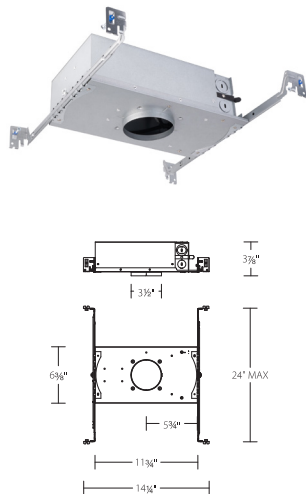

New Construction Trimless

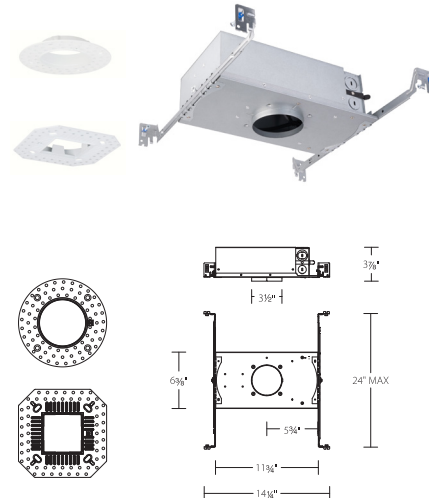

HOUSINGS	Model		Power	Rating
New Construction Trimmed	A1RS-2661L-DW	Round and Square	Airtight	15W IC
New Construction Trimless	A1RS-2471L-DW	Round (Spackle frame included)	Airtight	15W IC
	A1RS-2571L-DW	Square (Spackle frame included)	Airtight	

A1RS-____-____

Example: A1RS-2471L-DW

REPLACEMENT DRIVER

Housing Model	Power	Replacement Driver Model
A1RS-2661L-DW, A1RS-2471L-DW, A1RS-2571L-DW	15W	D-R2FN-1

aispire.com Phone (800) 526.2588 Fax (800) 526.2585	Headquarters, East Manufacturing Facility 44 Harbor Park Drive Port Washington, NY 11050	South East Manufacturing Facility 1600 Distribution Ct Lithia Springs, GA 30122	Central Manufacturing Facility 1700 South J Elmer Freeway, Ste 100 Cedar Hill, TX 75104	West Manufacturing Facility 1750 S Archibald Ave Ontario, CA 91761
---	--	---	---	--