

120/277VAC, 6 X 600mA (2-21VDC)

Dimmable Remote Power Supply



Fixture Type:

Catalog Number:

Project:

Location:

FINISHES



Black

Model & Product

L x W x H

A2D60-o600A6

10 7/8" x 3 7/8" x 1 1/4"

Example: A2D60-o600A6


PRODUCT DESCRIPTION

This class 2 UL & cUL listed enclosed electronics power supply is one of the most exciting LED power supplies available. What makes this dimmable LED power supply unique is that it has 6 output terminals with time saving terminate conductors from 24-12 AWG of solid, stranded and fine-stranded conductors by pull the lever up, insert a conductor and push the lever back down. It is compatible with TRIAC/ELV or 0-10V dimmer. Additionally, it features different kinds of protection from over voltage to short circuit. It is incredibly robust and includes a 5 years warranty. It works with an input voltage of 120-277VAC so you can utilize it for many commercial applications. It features an integrated wiring compartment for a streamlined installation.

FEATURES

- Universal Input 120-277VAC
- ≥ 0.9 pf
- Overload and short circuit protection
- TRIAC/ ELV/0-10V Dimming Control
- 0-10V Dimming curve adjustment
- Class 2 Output
- 5 Year warranty

LINE DRAWING

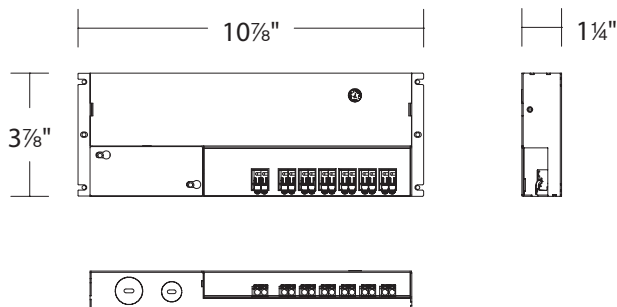

SPECIFICATIONS

Input:	120-277VAC
Output:	6 X 600mA, 2-21VDC
Dimming:	TRIAC/ELV/0-10V: 100-1% 0-10V Minimum Current Source: 95uA 0-10V Maximum Current Sink: 150uA
Rated Life:	50,000 hours
Mounting:	Can be mounted on ceiling or wall in all orientations
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	UL, cUL, Damp Location Listed,

aispire.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters, East Manufacturing Facility

44 Harbor Park Drive

Port Washington, NY 11050

South East Manufacturing Facility

1600 Distribution Ct

Lithia Springs, GA 30122

Central Manufacturing Facility

1700 South J Elmer Freeway, Ste 100

Cedar Hill, TX 75104

West Manufacturing Facility

1750 S Archibald Ave

Ontario, CA 91761