

MAGNETIC TRANSFORMER - 600W

A2Ego-1600-SS



Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model

A2Ego-1600-SS 600W Max

Example: **A2Ego-1600-SS**

DESCRIPTION

Magnetic transformer for Landscape Lighting products.

FEATURES


- IP65 Rated
- Two sets of taps for 12V, 13V, 14V and 15V
- Knock outs for power and photosensor connections
- 3-prong outlet for timer
- Outdoor rated stainless steel transformer contains an outdoor rated 3-prong plug for power
- 5' lead wire
- UL 1838 Listed

SPECIFICATIONS

Input: 120VAC

Output: 12VAC, 13 VAC, 14VAC, 15VAC; 600W / 600VA

LINE DRAWING

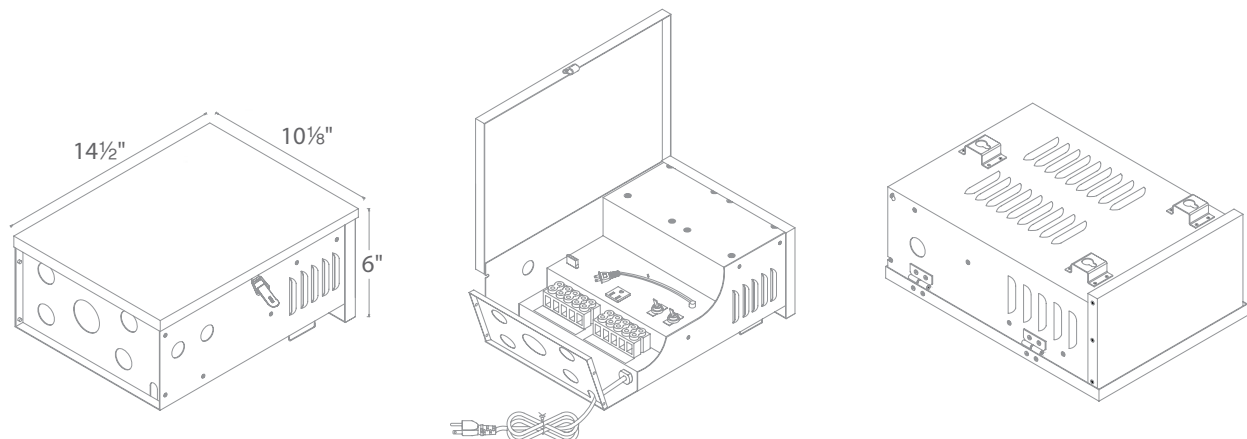

aispire.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760



AURORA

Painting with Light – Full Visible Spectrum

AiSPiRE

A W A C C O M P A N Y

WHAT IS AURORA?

- Gradients of saturated colors from 1 - 100%
- On board closed loop thermal feedback compensates each color channel for thermally induced variations in optical output due to tuning, dimming or ambient temperatures.
- On board closed loop optical feedback measures the lumen depreciation of each channel and rebalances the color model to ensure color consistency over the 50,000 hour life of the module.

WHY PAINT WITH FULL SPECTRUM LIGHT?


Until recently, all light – sunlight, firelight, candlelight, incandescent light – was full spectrum light. Full spectrum light contains all of the visible colors, and, like sunlight, renders colors naturally. Creating electric sunlight means that we needed to mix multiple colors (also known as channels) to replicate the color, beauty and range of sunlight.

WHAT ARE THE BENEFITS OF TUNABLE COLOR?

The 1650-8000K tunable range, 90+ CRI color quality, LED dimming to 0.1%, <2 SDCM color consistency over life, and access to a wide gamut of colors enable the delivery of different lighting profiles that expertly resolve the multiple lighting objectives in your room.

WHAT ARE THE TWO LIGHTING PROFILES OFFERED?

The tunable color profile features a broad tunable range from 1650K to 8000K. The light tracks the CIE Blackbody locus from 1650 - 4500K and then smoothly transitions to the Daylight Curve to 8000K – emulating natural daylight from sunrise to sunset. The warm-dim halogen profile recreates traditional dimming by emulating a halogen lamp from 3050K at full brightness to 1800K at 0.1%.

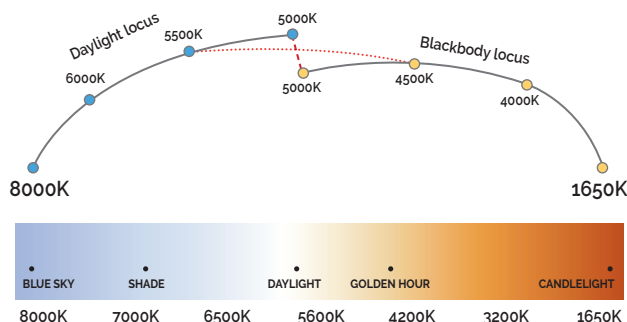

DYNAMIC DAYLIGHT

Blackbody to Daylight Curve



The Best Light: Aurora recreates and controls light that emulates the spectral quality of daylight — accesses a rich gamut of pastels and saturated colors to unveil new design frontiers.



LED DIMMING

100% - 0.1%

aispire.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760



AURORA

Painting with Light – Full Visible Spectrum

AiSPIRE

A W A C C O M P A N Y



ARCHITECTURE & LANDSCAPE ILLUMINATION

There are extraordinary opportunities in the outdoor lighting environment for controlled illumination. Especially with the addition of robust control of saturation and hue, designers and owners enjoy a level of precision, before thought impossible. Facades can be painted with the exact color desired, and plant materials can be individually selected and then illuminated. Scenes can be preset, and corporate brand colors can be introduced without gels or filters, which invariably shift over time.


CONTROL COMPATIBILITY

ANALOG - DMX can be used to control Dimming and CCT independently, or program Scenes – in any combination of Dimming, CCT, Saturation, and Hue – and recall them with presets or the WAC iOS App.

IOS - Used in conjunction with Digital or Analog controls, each module can be wirelessly commissioned and then the radio turns off for enhanced security.




0 - 10V



COLOR CONSISTENCY


For fixture-to-fixture color consistency, the light maintain less than 2 Standard Deviation Color Matching over life. 95% of the general population cannot distinguish any difference in the color of light that is <2 SDCM.

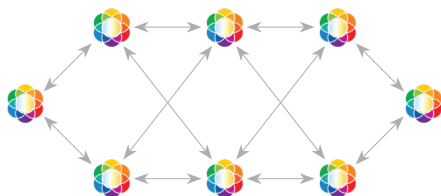

COLOR CONSISTENCY OVER LIFE

Less than 2 SDCM

AURORA SPECTRAL DISTRIBUTION CURVE (SPD)

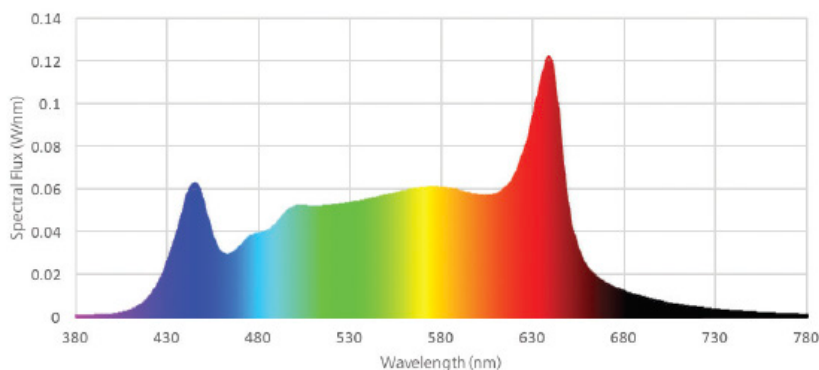

AURORA

SPD at 4000K

aispire.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760