

Alpine Micro

A2RU-D56M, A2RU-P56M - Square Downlight and Pinhole Trim



Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

Minuscule and mighty, peerless and powerful, the new potent Aether Atomic launches into the light. An engineering recessed marvel for next generation futurists. Sublime and serviceable, it's an icon for the ages. Atomic breaks the mold with robust illumination from a diminutive aperture, for a clean, quiet ceiling.

FEATURES

- Robust lumen output from 1" or 2" aperture
- Low glare for good visual comfort
- Field changeable beam angle with reflectors provided
- Low profile housing for installation in shallow plenums
- 5 year warranty

SPECIFICATIONS

Construction:	Injection molded polycarbonate low glare trim
Dimming:	100% - 1% ELV, TRIAC and 0-10V
Input Power:	11W
Light Source:	High output COB LED rated life of 50,000 hours
Finish:	Black, Black/White, Gold/White, Haze/White, White
Standards:	ETL & cETL Wet location listed, IC rated Airtight Title 24 JA8 Compliant

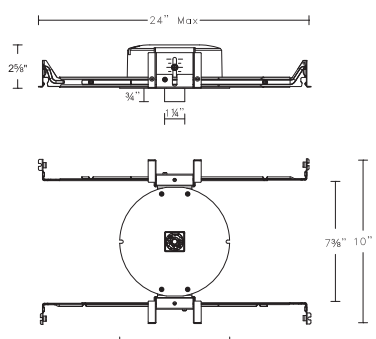
Trims (Order Housing and Power Supply Separately)	Model	Beam	Color Temp	CRI	Lumens	CBCP	Finishes
	A2RU-D56M Square Downlight Trim (N, F, W beam reflectors included)	N 26°	2700K 3000K 3500K 4000K	90	850 910 975 1040	2735 2940 3145 3350	BK BKWT GLWT HZWT WT Black Black/White Gold/White Haze/White White
		F 36°	2700K 3000K 3500K 4000K	90	885 950 1020 1085	2275 2445 2620 2790	
		W 55°	2700K 3000K 3500K 4000K	90	770 830 885 945	725 780 835 890	
	A2RU-P56M Square Pinhole Trim (N, F beam reflectors included)	N 26°	2700K 3000K 3500K 4000K	90	515 550 590 630	2210 2375 2545 2710	BK WT Black White
		F 32°	2700K 3000K 3500K 4000K	90	545 585 625 665	1830 1965 2105 2240	

A2RU-____-____




Example: A2RU-D56M-BKWT

Please see next page for housing and power supply units (required)

Housing (Required) - Order separately from trims

	Model	Power	Color Temp	CRI
	A2RU-256 Square Trim IC-Rated, Airtight	11W	27 2700K 30 3000K 35 3500K 40 4000K	90

A2RU-256-___Example: **A2RU-256-30**Remote Power Supply (Required) -
Order separately from trims and housings


	Model	Input	Output	Max # of fixtures per channel	Dimmable	
	A2D60-0600A1	120V - 277V	1 Channel UL Class 2	1 per Channel	100%-1% ELV, TRIAC, 0-10V	8 3/4" x 2" x 1 3/8"
	A2D60-0600A6	120V - 277V	6 Channels UL Class 2	1 per Channel	100%-1% ELV, TRIAC, 0-10V	10 7/8" x 3 7/8" x 1 3/8"
	A2D20-BK	120V	4 Channels UL Class 2	Up to 2 per Channel	100%-1% DMX 512-A, DMX 512	12 7/16" x 9 1/8" x 2 7/8"
	A2D40-BK	120V	8 Channels UL Class 2	Up to 2 per Channel	100%-1% DMX 512-A, DMX 512	12 7/16" x 14 15/16" x 2 7/8"

Example: **A2D60-0600A6**

Home-run wiring. Recommended maximum distance between power supply and compatible light fixture is shown in below table:

	18 AWG	16 AWG	14 AWG	12 AWG
Maximum distance between power supply and light fixture	100 ft	150 ft	200 ft	250 ft

Accessory (Sold Separately)

	Model	Description
	A2RU-TOOL	Service tool for removing trim and light engine

Example: **A2RU-TOOL**