


ENCHANTED RPS

A2W60-30 21" Wall Sconce 3000K

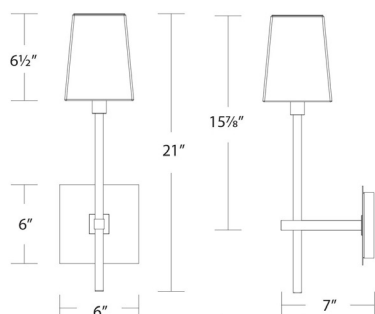


Fixture Type:

Catalog Number:

Project:

Location:

FINISHES



Model	Forward Voltage	Max. Drive Current	Max. # of Fixtures	Power	Color Temp	Max Lumens	CRI	Finish
A2W60 (Low Voltage)	33V	350mA	1 per channel	15W	30 3000K	828	90	AB BN Aged Brass Brushed Nickel

Example: **A2W60-30AB**

*AISPIRE RPS Required, Sold Separately

DESCRIPTION

Vintage forms with modern sensibility. Bridging traditional with a clean modern appeal.

FEATURES

- AISPIRE remote power supply (RPS) required, sold separately
- Fabric shade comes in square design
- Front light and downlight
- 5 year warranty

SPECIFICATIONS

Construction:	Aluminum hardware with fabric diffuser
Input:	Class 2 Low Voltage, DC Power See Fixture Configuration table above.
Remote Power Supplies (RPS):	A2W20-30 Reference compatible RPS specifications for further requirements
Dimming:	Refer to RPS specifications for protocol and compatibility
Light Source:	High output 3 Step MacAdam Ellipse LEDs, 90+ CRI Rated life of 50,000 hours at L70
Finish:	Aged Brass or Brushed Nickel plating finish
Standards:	ETL & cETL Damp Location Listed
Operating Temp:	-4°F to 104°F (-20°C to 40°C)