

AiSPIRE POWER SUPPLY

96w REMOTE POWER SUPPLY



Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

FINISHES



Black

<i>Model</i>	
HDR-100-24N	96W 24VDC Class 2 Output Power Supply
Example: A2D10-96	

DESCRIPTION

This ultra slim DIN rail power supply is the perfect solution for wiring to DMX LED Controller in the cabinets. Class 2 Isolation is intrinsically safer power supply because they pose no risk for electrical shock. TS35/15 or 35MM DIN rail mounting capability is integrated into the case design.


FEATURES

- Short Circuit, over load, over voltage protection
- Class 2 Isolation output
- DIN Rail
- 3 years warranty

SPECIFICATIONS

Construction:	Plastic
Input:	120VAC
Output	24VDC
PF	>0.9
THD	<20%
Mounting	35MM DIN Rail
Dimension	70 X 90 X 54.5 MM(L X W X H)
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	EN61000-3-2 Class A, IEC62368-1, UL508, UL61558-2-16, EN55032 (CISPR32), CNS13438 Class B

LINE DRAWING

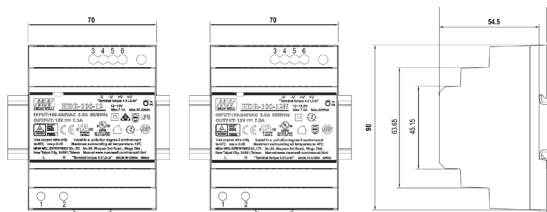

ADMISSIBLE DIN-RAIL: TS35/7.5 OR TS35/15

aispire.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760