

# ALPINE SHALLOW 3.5IN

## A1RD-A47, A1RD-A57 Trimless Adjustable




Fixture Type:

Catalog Number:

Project:

Location:

### FINISHES

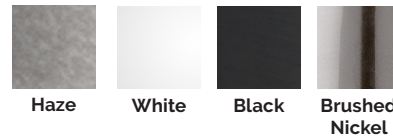

Model	Beam		Color Temp		CRI	Lumens	CBCP	Finish
A1RD-A47 Round 0°- 30° Adjustable	S	15°	27 30	2700K 3000K	90 90	880 920	4415 4590	HZ Haze WT White BK Black BN Brushed Nickel
	N	25°	27 30	2700K 3000K	90 90	925 965	3350 3485	
	F	50°	27 30	2700K 3000K	90 90	875 910	1465 1525	
A1RD-A57 Square 0°- 30° Adjustable	S	15°	27 30	2700K 3000K	90 90	830 865	4675 4860	
	N	25°	27 30	2700K 3000K	90 90	870 905	3335 3470	
	F	50°	27 30	2700K 3000K	90 90	820 855	1480 1540	
A1RD-A_7_-___ Example: A1RD-A47N-27WT								

### DESCRIPTION

Shallow housing that is designed to fit in tight plenum spaces without sacrificing lumen output.

### FEATURES

- IC-rated airtight housing
- Designed to fit in tight plenum
- 3.5" trim aperture, 3.5" housing height
- 0° - 30° Adjustability
- Universal input voltage (120V-277V)
- 5 year WAC Lighting product warranty
- Title 24 Compliant \*

### LINE DRAWING



### SPECIFICATIONS

<b>Construction:</b>	Die-cast aluminum trim with extruded aluminum heat sink
<b>Dimming:</b>	100% - 0% with 0-10V dimmer 100% - 5% with Electronic Low Voltage (ELV) dimmer
<b>Input:</b>	120V-277V AC
<b>Power:</b>	15.5W, power factor 0.98
<b>Mounting:</b>	Retention clips firmly hold trim to housing
<b>Finish:</b>	Powder coated White, Black. Enamel coated Haze.
<b>Standards:</b>	ETL & cETL Damp Location Listed
<b>Ceiling thickness:</b>	1/2" - 1 1/2"

aispire.com  
Phone (800) 526.2588  
Fax (800) 526.2585


Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760

# ALPINE SHALLOW 3.5IN

## A1RD-268 *Housing*

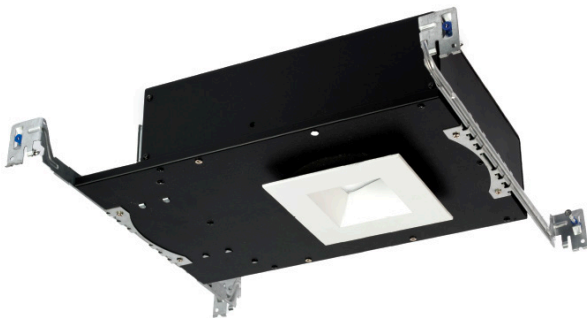

Model

A1RD-268	New Construction IC-rated, Airtight
Example: A1RD-268	

LINE DRAWING

